

OONO®  
czh-labs.com

**Plastic Enclosure Wired  
SPST 40 Amp Power Relay Module  
Model: F-1061 40A series**



## Features:

- Polycarbonate plastic enclosure with a NPT 1/2" mounting nipple, LED indicator and pre-wired for a money-saving installation that is easy and quick.
- Input control signal version: AC/DC 12V and AC/DC 24V two versions selectable. When controlled by a DC signal, the two wires on the input end do not need to care about their polarities.
- Output switch SPST (Single Pole Single Throw). Rated current 40A. Rated voltage DC 30V.
- This is a simple and practical passive relay module, which is very convenient to use. All wires lead out via 1/2" mounting nipple, it can be flexible mounting with your junction box / outlet box. Two screw mounting holes are convenient for you to fix it on the wall or wooden board.
- Packing list: 1x relay module, 1x NPT 1/2" Zinc alloy conduit locknut, 2x M3x50mm screws.

## Specifications:

### Input Control Signal:

	F-1061 40A 12V	F-1061 40A 24V
Action voltage	AC 10 - 15V or DC 10 - 18V	AC 20 - 30V or DC 20 - 36V
Action current	150mA @12V	75mA @24V


### Output Switch:

	F-1061 40A, 12V 24V
Rated load	40A 30VDC (resistive load).
Mechanical endurance	10,000,000 operations
Electrical endurance	100,000 operations at 24 VDC 10 A (resistive load, room temp., 5s on 5s off)

### Input and Output Status:

Input Signal	LED	Output Switch
Low (or no connect)	OFF	Output switch disconnect
High	ON	Output switch connected

# Dimensions:

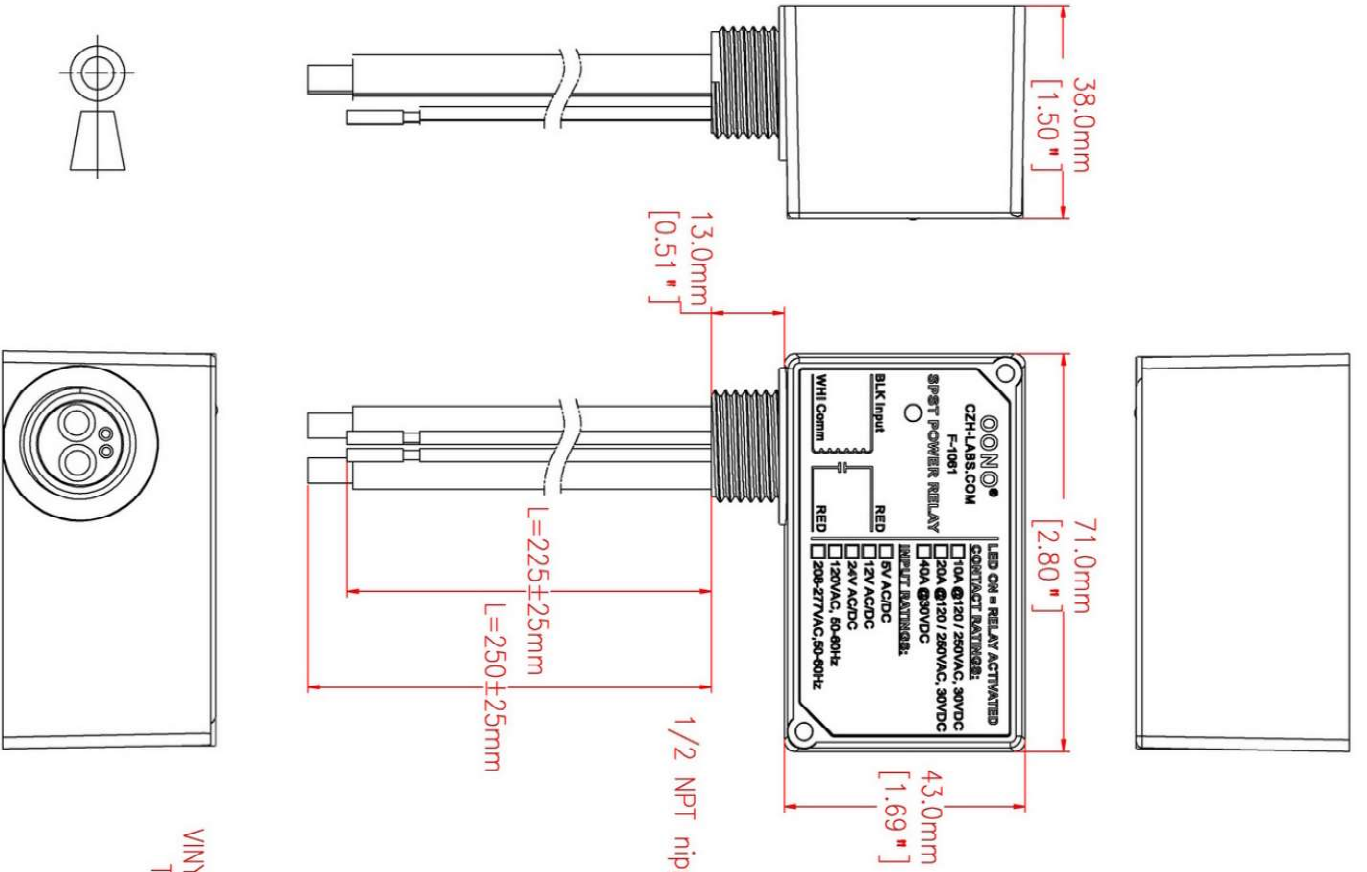

VINYL-INSULATED RING  
TERMINALS\_2PCS



0.5" NPT NUT\_1PCS



Screw M3\*50mm\_2PCS

